

# INSPIRING PROFESSIONALISM

we  
guarantee  
you  
complete  
peace  
of  
mind



# CERTIFICATES

The superiority of Sun Safes' products has been demonstrated not only by customers but also by world famous authorities in the security industry.

**A SAFE IS NOT JUST A STEEL BOX, BUT A SKILL and A SCIENCE.**

UL(Underwriters Laboratories Inc.) - UL 72, Fourteenth Edition(Class 350 - 1 hour)

UL(Underwriters Laboratories Inc.) - UL 1037, Antitheft Alarm and Devices

SP(Swedish National Testing and Research Institute) - NT-Fire 017 - 60P / 90P / 120P - 60 Diskette, 90 Data

ISO 9001 (Korea Productivity Center Quality Assurance)

ISO 14001 (Korea Productivity Center Quality Assurance)

JIS(Japanese Industrial Standardization) - JIS S 1037 / PR-1T

KS(Korea Standards Association) - KS G 4500


GOST POCC KR. C307.B03250 (No. 5589108-5589110)

EURO GRADE 1 (SS-EN 1143-1, 2005 GRADE 1)



# FIRE & DROP TEST

Fire resistant testing in accordance with KS G 4500, UL-72, SP NT-Fire 017 - 60P / 90P / 120P

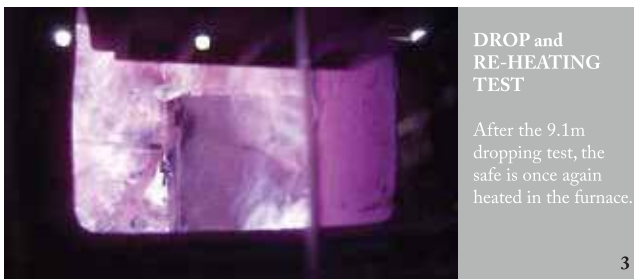

# ACTUAL FIRE ACCIDENT



# MEDIUM TO LARGE SIZED FIRE RESISTANT SAFES



ES-100


Ideal for home and / or business use, this fire-resistant safe has enough capacity to hold and protect all of your valuables and important documents from fire



- High security, fire-resistant safes in a variety of sizes with several proven certificates
- 1 hour or 2 hours fire protection certified by KS 1 hour(Furnace Temperature : 927°C) and SP NT-Fire 017 120P(Furnace Temperature : 1049°C)
- Three-way main bolt works with independent relocking device
- Two to three stationary locking bolts on hinge side to deter prying attack on hinges
- Lockable drawer + adjustable shelf
- Wheels for easy moving(Removable wheels are optional.)
- Pre-drilled anchor hole without wheels(Optional)

## LOCK OPTIONS

EK	
CK	
KK	
KX	Handle + One key only

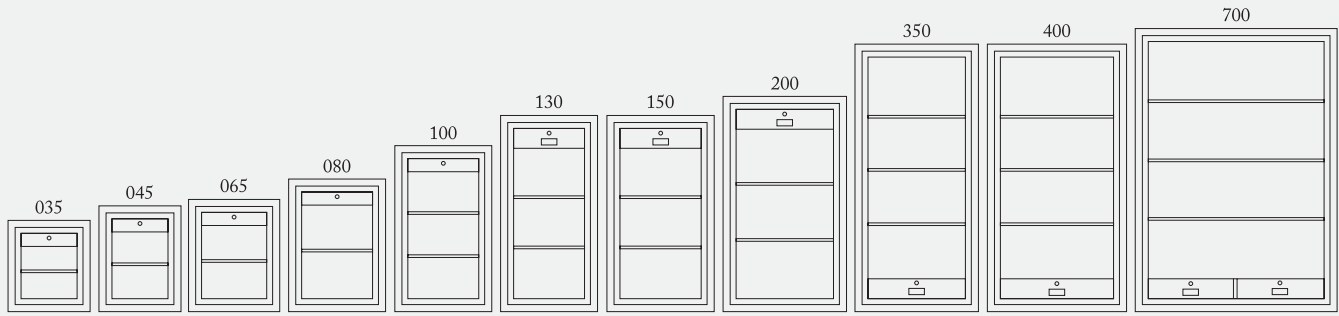

SS-700

## DIMENSIONS

Model	Outside(mm)			Inside(mm)			Weight (Kgs)	Outside(inch)			Inside(inch)			Weight (lbs)	Drawer / Shelf
	H	W	D	IH	IW	ID		H	W	D	IH	IW	ID		
ES-035 SS-035	616	491	467	389	338	304	96	24 1/4	19 1/3	18 2/5	15 1/3	13 1/3	12	211	1 / 1
ES-045 SS-045	703	479	467	475	326	304	105	27 2/3	18 6/7	18 2/5	18 5/7	12 5/6	12	231	1 / 1
ES-065 SS-065	743	549	507	519	398	346	120	29 1/4	21 3/5	20	20 3/7	15 2/3	13 5/8	264	1 / 1
ES-080 SS-080	865	580	507	638	427	346	185	34	22 5/6	20	25 1/8	16 4/5	13 5/8	407	1 / 1
ES-100 SS-100	1066	585	507	833	426	346	200	42	23	20	32 4/5	16 7/9	13 5/8	440	1 / 2
ES-130 SS-130	1245	585	507	1012	426	346	220	49	23	20	39 5/6	16 7/9	13 5/8	484	1 / 2
ES-150 SS-150	1245	642	630	1012	483	463	285	49	25 2/7	24 4/5	39 5/6	19	18 2/9	627	1 / 2
ES-200 SS-200	1356	737	630	1123	578	463	340	53 2/5	29	24 4/5	44 1/5	22 3/4	18 2/9	748	1 / 2
ES-350 SS-350	1671	737	630	1438	578	463	380	65 4/5	29	24 4/5	56 3/5	22 3/4	18 2/9	836	1 / 3
ES-400 SS-400	1671	832	630	1438	673	463	410	65 4/5	32 3/4	24 4/5	56 3/5	26 1/2	18 2/9	902	1 / 3
ES-700 SS-700	1769	1206	654	1536	1047	487	670	69 2/3	47 1/2	25 3/4	60 1/2	41 2/9	19 1/6	1474	2 / 3

\* Height of castor(74mm) is included into outside dimensions.