


## Complete Range of Water Pumps Powered by Honda Engine

- Highly effective mechanical seal made with special carbon ceramics provides extra durability.
- Entire unit is protected by sturdy rollover pipe frame.
- Strong and lightweight die-cast aluminum pump.



### ■ Performance Curve

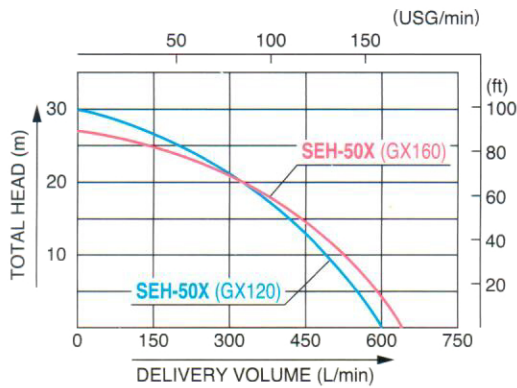

SEH-50X



SEH-80X

### ■ Specifications

Model		SEH-50X	SEH-80X
PUMP	Connection Dia	50 mm (2")	80 mm (3")
	Connection Thread	Outer Pipe Thread BSP	
	Total Head	30 m (98 ft)	27 m (88 ft)
	Delivery Volume	600 L/min (158 USG/min)	1100 L/min (290 USG/min)
	Max. Suction Head	8 m (26 ft)	
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine	
	Model	Honda GX120	Honda GX160
	Exhaust Volume	118 cc	163 cc
	Rated Output	2.1 kW (2.9 PS) / 3600 rpm	2.9 kW (3.9 PS) / 3600 rpm
	Max. Output	2.6 kW (3.5 PS) / 3600 rpm	3.6 kW (4.9 PS) / 3600 rpm
	Fuel	Automotive Unleaded Gasoline	
	Fuel Tank Capacity	2.0 L (0.53 USG)	3.1 L (0.82 USG)
	Continuous Operating Time	Approx. 2 hrs	
Starting Method	Recoil Starter		
Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set		
Gross Weight	22 kg (48.5 lbs)	30 kg (66.1 lbs)	
Dimensions LxWxH (mm)	483 x 375 x 376	525 x 389 x 458	
Packing Unit	1		

