


■ Performance Curve



Powered by Honda Engine

- Highly effective mechanical seal made with special carbon ceramics provides extra durability.
- Entire unit is protected by sturdy rollover pipe frame.
- Strong and lightweight die-cast aluminum pump.

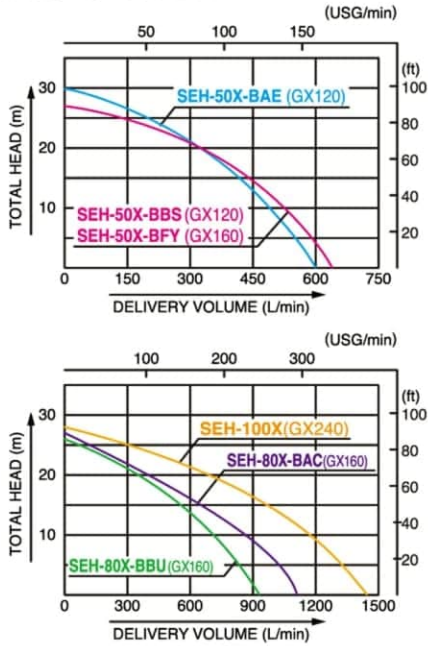

Model	SEH-50X		SEH-80X		SEH-100X
Connection dia. (mm)	50 (2")		80 (3")		100 (4")
Connection thread	Outer pipe thread				
Delivery head (m)	30		26		28
Delivery volume (L/min)	600		930	970	1450
Suction head (m)	8				
Engine	HONDA				
Engine model	GX 120	G 200	GX 160	G 200	GX 240
Engine type	Forced air-cooled 4-stroke gasoline engine				
Exhaust volume (ml)	118	197	163	197	242
Output power (kW/rpm)	2.6/3600	3.7/3600	3.6/3600	3.7/3600	5.3/3600
(HP/rpm)	3.5/3600	5.0/3600	4.9/3600	5.0/3600	7.2/3600
Fuel	Automotive unleaded gasoline				
Fuel tank capacity (L)	2	4.3	3.1	4.3	5.3
Continuous operating time	~ 2 hrs	~ 3 hrs	~ 2 hrs 10 mins	~ 3 hrs	~ 2 hrs 30 mins
Starting method	Recoil starter				
Standard accessories	1 strainer, 2 hose couplings, 3 hose bands, 1 engine tool set				
Gross weight (kg)	24	29	34	32	59
Dimensions l x w x h (mm)	493 x 377 x 415	527 x 429 x 535	530 x 399 x 473	527 x 429 x 535	680 x 487 x 684
Packing unit	1				