

Clear Water Pump

Powered by KOSHIN

**Gasoline
Engine**




SEV-100X

Outstanding Features

- 1500L/min Discharge Volume with 4" Discharge dia
- 8m Suction Lift
- For Pumping water and Watering Crops

Model name			SEV-100X
Category			Self-priming, Centrifugal pump
Pump	Connection dia	Suction	100 mm (4")
		Discharge	100 mm (4")
	Connection thread		Outer pipe thread BSP
	Total head		28 m (91ft)
	Discharge volume		1500 L/min (396 USG/min)
	Max. suction head		8 m (26 ft)
Engine	Type		Forced air-cooled 4-stroke gasoline engine
	Model		KOSHIN K300
	Displacement		301 cm3
	Rated output		5.0 kW(6.8 PS) / 3600 rpm
	Max. output		6.0 kW(8.2 PS) / 3600 rpm
	Fuel		Automotive unleaded gasoline
	Fuel tank capacity		Tank size: 6.5 L (1.71 USG), Usage level: 5.9 L (1.55 USG)
	Engine oil		4-stoke engine oil:API grade SE or above, SAE 15W-40
	Engine oil capacity		1.1 L (0.29 USG)
	Continuous operating time		Approx. 1.8 hrs
Applicable liquids	Starting method		Recoil starter
	Consistency		Clear water
	Suspended solid percentage		-
	Max. solids size		-
	Temperature		5-45 ° C (41-113 ° F)
Standard accessories			1 Strainer, 2 Coupling sets, 3 Hose bands, 1 Engine tool
Net weight			54.9 kg (121.0 lbs)
Gross weight			64.3 kg (141.8 lbs)
Product dimensions L x W x H (mm)			683 × 495 × 645
Packing dimensions L x W x H (mm)			718 × 525 × 675

Performance Curve

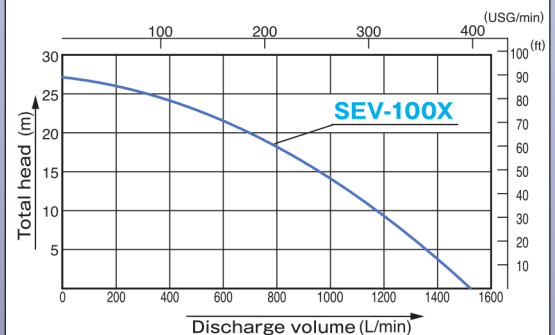

ROBIN MACHINERY & EQUIPMENT
SOURCE OF TRUST

Robin Machinery & Equipment

PO Box 5229, Dubai – United Arab Emirates

Tel: +971 4 221 7124 / 221 5841

Email: alawitra@emirates.net.ae / Website: www.robinme.ae

*Design and specifications are subject to change without notice.