


KOSHIN

Performance Curve

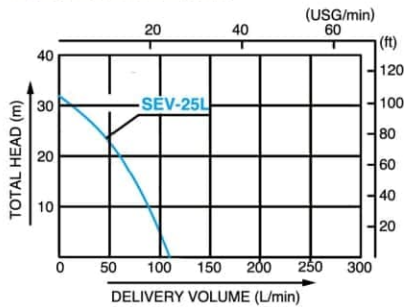

Note: Performance ratings are guaranteed minimum, not inflated maximum.

Performance Curve



ULTRALIGHT 4-STROKE ENGINE

- EASIER STARTING!
- LESS NOISE!
- Compact Environmentally Friendly 4-stroke engine
- Cleaner exhaust emissions
- Half the CO and NOx emissions of a 2-stroke engine



New! Clear Water Pump

- Low fuel consumption. The original Koshin engine achieves the lowest fuel consumption.
- Low Vibration. Comfortable in use after reducing engine vibration.
- Guaranteed performance Koshin guarantees 8 m suction head and specifications.



Model	SEV-25L	SEV-50X	SEV-80X
Connection dia. (mm)	25 (1")	50 (2")	80 (3")
Connection thread	Outer thread pipe		
Delivery head (m)	32	25	
Delivery volume (L/min)	110	620	1050
Suction lift (m)	8		
Engine	KOSHIN		
Engine model	KC 26	K 180	
Engine type	Forced air cooling 2-stroke gasoline engine	Forced air cooling 4-stroke gasoline engine	
Exhaust volume (ml)	26	179	
Output power (kW/rpm)	0.82/7500	3.1/3600	
(HP/rpm)	1.1/7500	4.2/3600	
Fuel	2-stroke mixed gasoline and oil	4-stroke unleaded gasoline	
Fuel tank capacity (L)	0.6	3.6	
Continuous operating time	~ 1 hr	~ 2 hrs	~ 1 hr 10 mins
Starting method	Recoil start		
Standard accessories	1 strainer, 2 hose couplings, 3 hose bands, 1 engine tool set		
Gross weight (kg)	6	24.2	27.7
Dimensions l x w x h (mm)	350 x 260 x 350	514 x 410 x 426	533 x 435 x 483
Packing unit	1		

